


TYPE: ME.TRE-40 40VA
CORE SIZE: EI66/30

Features

- Epoxy resin cast
- Two chambers bobbin
- Insulation primary-secondary: 4KV
- Increased humidity resistance

Manufacturing standard: EN 61558

- Safety insulation transformer
- Max.ambient temperature: ta 70°C
- Insulation class: ta 70°C/B 130°C
- Double insulated
- Degree of protection: IP00
- Not short-circuited

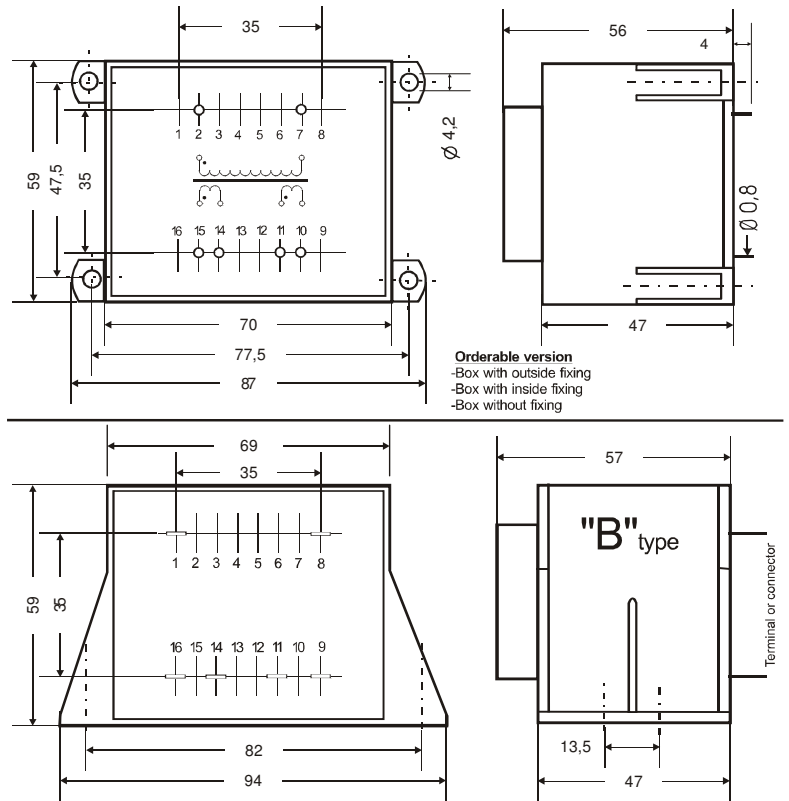

Application

- PCB mounting installation
- “B” version to fitting

Ordering codes

- “N” without fixing possibility
- “K” with fixing possibility
- “B” vertical mounting version

Deviation of secondary voltages 5%
Prescribed primary circuit fuse 250mA

Modell number	Primary voltage	Pin configuration	Secondary voltage	Pin configuration	Secondary current
ME.TRE-40.66306/	230 V	2-7	6 V	11-14	6,66 A
ME.TRE-40.66375/	230 V	2-7	7,5 V	11-14	5,33 A
ME.TRE-40.66309/	230 V	2-7	9 V	11-14	4,44 A
ME.TRE-40.66312/	230 V	2-7	12 V	11-14	3,33 A
ME.TRE-40.663135/	230 V	2-7	13,5 V	11-14	2,96 A
ME.TRE-40.66315/	230 V	2-7	15 V	11-14	2,66 A
ME.TRE-40.66318/	230 V	2-7	18 V	11-14	2,22 A
ME.TRE-40.66322/	230 V	2-7	22 V	11-14	1,81 A
ME.TRE-40.66324 /	230 V	2-7	24 V	11-14	1,66 A

ME.TRE-40.66306-2/	230 V	2-7	2×6 V	10-11 14-15	2×3,33 A
ME.TRE-40.66375-2/	230 V	2-7	2×7,5 V	10-11 14-15	2×2,66 A
ME.TRE-40.66309-2/	230 V	2-7	2×9 V	10-11 14-15	2×2,22 A
ME.TRE-40.66312-2/	230 V	2-7	2×12 V	10-11 14-15	2×1,66 A
ME.TRE-40.663135-2/	230 V	2-7	2×13,5 V	10-11 14-15	2×1,48 A
ME.TRE-40.66315-2/	230 V	2-7	2×15 V	10-11 14-15	2×1,33 A
ME.TRE-40.66318-2/	230 V	2-7	2×18 V	10-11 14-15	2×1,11 A
ME.TRE-40.66324-2/*	230 V	2-7	2×24 V	10-11 14-15	2×0,83 A

*Certified as insulation transformer