


**TYPE: ME.TRE-60 60VA**  
**CORE SIZE: EI75/32,7**

**Features**

- Epoxy resin cast
- Two chambers bobbin
- Insulation primary-secondary: 4KV
- Increased humidity resistance

**Manufacturing standard: EN 61558**

- Safety insulation transformer
- Max.ambient temperature: ta 70°C
- Insulation class: ta 70°C/B 130°C
- Double insulated
- Degree of protection: IP00
- Not short-circuited

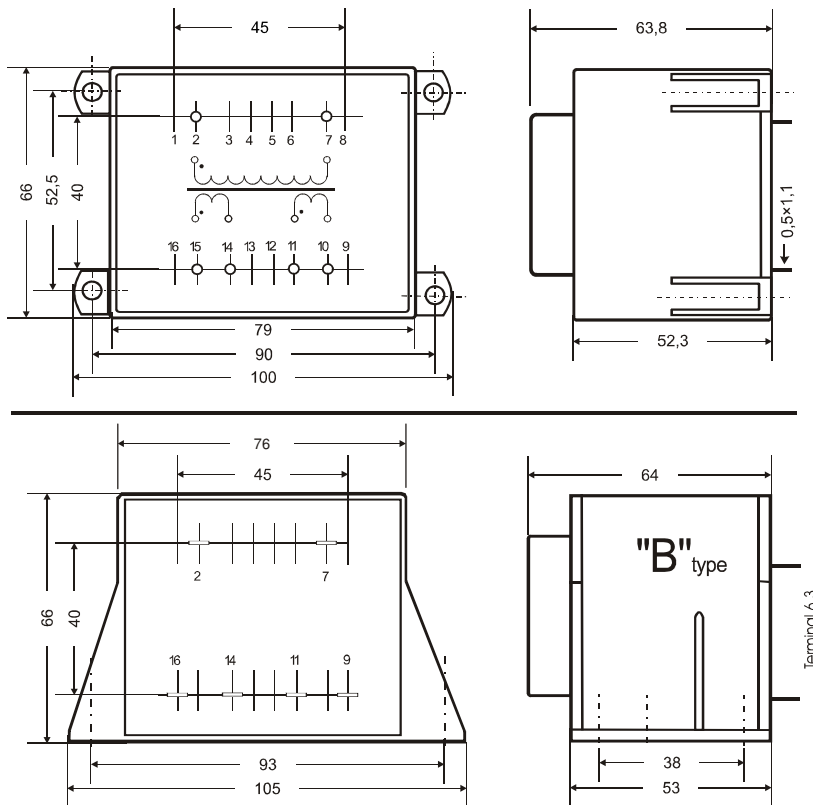

**Application**

- PCB mounting installation
- “B” version to fitting

**Ordering codes**

- “N” without fixing possibility
- “K” with fixing possibility
- “B” vertical mounting version

*Deviation of secondary voltages 5%*

*Prescribed primary circuit fuse 400mA*

Modell numer	Primary voltage	Pin configuration	Secondary voltage	Pin configuration	Secondary current
ME.TRE-60.75306/	230 V	2-9	6 V	11-14	10,00 A
ME.TRE-60.75375/	230 V	2-9	7,5 V	11-14	8,00 A
ME.TRE-60.75309/	230 V	2-9	9 V	11-14	6,66 A
ME.TRE-60.75312/	230 V	2-9	12 V	11-14	5,00 A
ME.TRE-60.753135/	230 V	2-9	13,5 V	11-14	4,44 A
ME.TRE-60.75315/	230 V	2-9	15 V	11-14	4,00 A
ME.TRE-60.75318/	230 V	2-9	18 V	11-14	3,33 A
ME.TRE-60.75324 /	230 V	2-9	24 V	11-14	2,50 A

ME.TRE-60.75306-2/	230 V	2-9	2x6 V	12-14 17-19	2x5,00 A
ME.TRE-60.75375-2/	230 V	2-9	2x7,5 V	12-14 17-19	2x4,00 A
ME.TRE-60.75309-2/	230 V	2-9	2x9 V	12-14 17-19	2x3,33 A
ME.TRE-60.75312-2/	230 V	2-9	2x12 V	12-14 17-19	2x2,50 A
ME.TRE-60.753135-2/	230 V	2-9	2x13,5 V	12-14 17-19	2x2,22 A
ME.TRE-60.75315-2/	230 V	2-9	2x15 V	12-14 17-19	2x2,00 A
ME.TRE-60.75318-2/	230 V	2-9	2x18 V	12-14 17-19	2x1,66 A
ME.TRE-60.75324-2/ *	230 V	2-9	2x24 V	12-14 17-19	2x1,25 A

\*Certified as insulation transformer